

# DAYTON SPECIFICATIONS

## Kingsford® Hospitality Sink and Sink Package Models K11515 and KP211515C

### GENERAL

Sink formed of #23 gauge, nickel bearing stainless steel. Self-rimming.

### DESIGN FEATURES

Bowl Depth: 5-1/8".

Coved Corners: 2-1/4" vertical and horizontal radius.

Finish: Exposed surfaces are polished to a buffed finish.

Underside: Fully undercoated to dampen sound and prevent condensation.

### SINK PACKAGE

**KP211515C** Package includes:

- (1) **K11515** sink.
- (1) **LKA2475** gooseneck faucet.
- (1) **D5018A** drain with basket strainer.

### OTHER

Drain Opening: 2".

NOTE: Unless otherwise specified, sink is furnished with 2 faucet holes as shown.


These sinks comply with ASME A112.19.3.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.



This faucet is classified by Underwriters Laboratories Inc. to **NSF/ANSI61** for residential use.

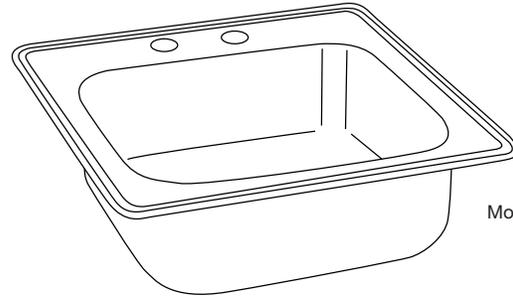

Model K115152

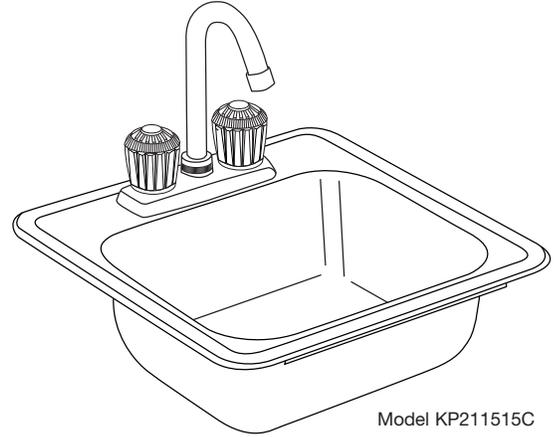


Model KP211515C

### SINK DIMENSIONS (INCHES)\*

Model Number	Overall		Inside Bowl			Cutout in Countertop (1 1/2" Radius Corners)		No. of 1 1/4" or 1 1/2" Dia. Faucet Holes 4" Centers	Minimum Cabinet Size
	L	W	L	W	D	L	W		
KP211515C	15	15	12	10	5 1/8	14 3/8	14 3/8	2	18
K11515	15	15	12	10	5 1/8	14 3/8	14 3/8	1, 2 or 3	18


\* Length is left to right. Width is front to back.

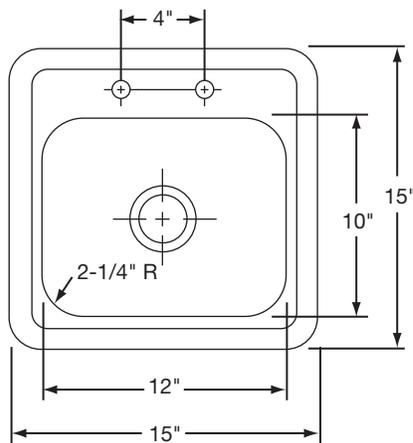

Bowl Depth is 5-1/8"

Model K115152 Illustrated

### HOLE DRILLING CONFIGURATIONS

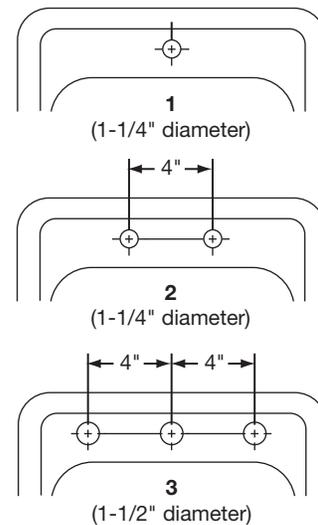

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

**Elkay**

elkayusa.com

2222 Camden Court  
Oak Brook, IL 60523

Printed in U.S.A.  
©2007 Elkay

(Rev. 8/07)

2-5E