

# ELKAY® SPECIFICATIONS

## Pacemaker® Single Bowl Classroom Sinks and Sink Packages – Double Ledge Models PSDKR2517, PSDKRQ2517, PSDKAD2517 and PSDKADQ2517 Series – A.D.A. Compliant

### GENERAL

Fine quality sink bowl is seamlessly drawn of #20 gauge, type 304 (18-8) nickel bearing stainless steel. Self-rimming.

### CLASSROOM/INSTITUTIONAL SINK PACKAGE

Models **PSDKR2517C**, **PSDKRQ2517C**, **PSDKAD2517C** and **PSDKADQ2517C** feature a maintenance free, scratch and crack resistant stainless steel work sink, single handle gooseneck faucet and No Lead Flexi-Guard® Bubbler. Package includes:

- (1) **LK208513L** Single Wing Handle faucet with fixed 13" high spout and aerator. Outlet height: 9-3/8"; Reach: 4-3/4".
- (1) **LK1141A** No Lead Flexi-Guard® Bubbler. Pushbutton valve design bubbler meets ANSI and ADA requirements. Designed so that water never comes in contact with lead-containing materials. Flexi-Guard safety bubbler flexes on impact to prevent accidental injury when getting a drink. Built-in adjustable water volume control.
- (1) **LK35** Duo strainer.

**PSDKR2517VRC, PSDKRQ2517VRC, PSDKAD2517VRC** and **PSDKADQ2517VRC** Package includes:

- (1) **LKVR208513L** Same as LK208513L faucet, except with vandal-resistant aerator and handle screw, and factory installed anti-rotation pins.
- (1) **LKVR1141A** Same as LK1141A except vandal-resistant, with metal bubbler guard and anti-rotation feature.
- (1) **LKVR18** Drain fitting with vandal-resistant 3" perforated grid strainer.

### OTHER

Drain Opening: 3-1/2".

Slotted hole allows for vandal-resistant faucet or bubbler.

NOTE: Unless otherwise specified, sink is furnished with 2 faucet holes as shown (see back page).

These sinks comply with ANSI Standard A112.19.3M.




Both the faucet and the bubbler are classified by Underwriters Laboratories Inc. to **NSF/ANSI61** for residential use.




Model PSDKR(Q)2517C

### U-Channel Type Mounting System

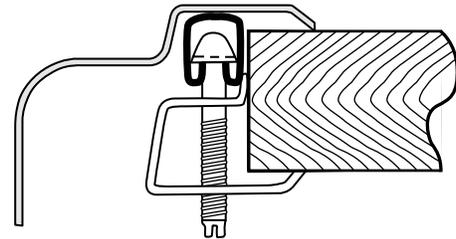

### Quick-Clip® Mounting System

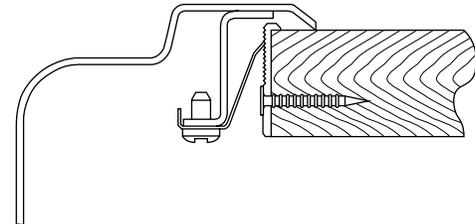

### SINK DIMENSIONS (INCHES)\*

| U-Channel Model Number | Quick-Clip® Model Number | Overall |    | Inside Bowl |     |    | Cutout in Countertop (1½" Radius Corners) |     | No. of Faucet Holes (see back page) | Minimum Cabinet Size | Ship. Wt. Lbs. |
|------------------------|--------------------------|---------|----|-------------|-----|----|---|-----|-------------------------------------|----------------------|----------------|
|                        |                          | L       | W  | L           | W   | D  | L   | W   |                                     |                      |                |
| PSDKR2517C             | PSDKRQ2517C              | 25      | 17 | 16          | 13½ | 7½ | 24¾                                       | 16¾ | 2                                   | 30                   | 23¼            |
| PSDKR2517VRC           | PSDKRQ2517VRC            | 25      | 17 | 16          | 13½ | 7½ | 24¾                                       | 16¾ | 2                                   | 30                   | 23¼            |
| †PSDKR2517             | †PSDKRQ2517              | 25      | 17 | 16          | 13½ | 7½ | 24¾                                       | 16¾ | 2, 2LM or 4                         | 30                   | 12             |
| PSDKAD2517C            | PSDKADQ2517C             | 25      | 17 | 16          | 13½ | 6½ | 24¾                                       | 16¾ | 2                                   | 30                   | 23¼            |
| PSDKAD2517VRC          | PSDKADQ2517VRC           | 25      | 17 | 16          | 13½ | 6½ | 24¾                                       | 16¾ | 2                                   | 30                   | 23¼            |
| †PSDKAD2517            | †PSDKADQ2517             | 25      | 17 | 16          | 13½ | ** | 24¾                                       | 16¾ | 2, 2LM or 4                         | 30                   | 12             |

\* Length is left to right. Width is front to back.

† Unless otherwise specified, all sinks which do not have suffix "C" are **less fittings** (no faucet, bubbler or drain), but are drilled for faucet, bubbler and drain as illustrated.


\*\* Available in 5½" or 6½" depths. Please consult your sales representative for other depths or modifications.

THIS PRODUCT, AS CONSTRUCTED IS SUBJECT TO INTERPRETATION OF A.D.A. REQUIREMENTS. THE UNOBSTRUCTED KNEE SPACE REQUIRED TO SATISFY A.D.A. STANDARDS MAY NOT BE DESIRABLE.


ALL DIMENSIONS IN INCHES. TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

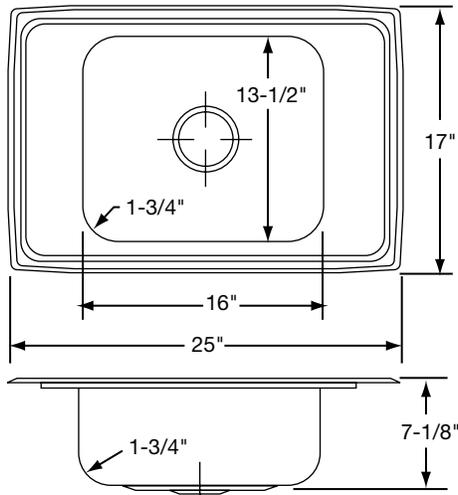


Model PSDKR(Q)2517 Illustrated

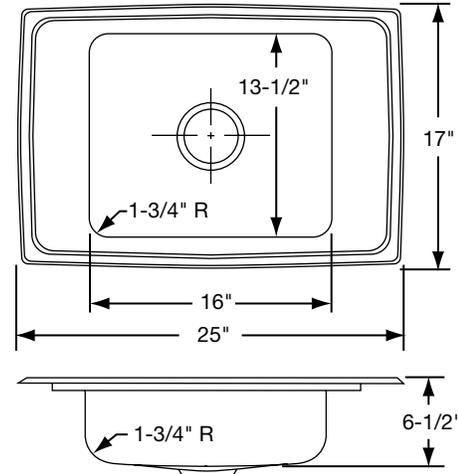



Model PSDKAD(Q)251765C Illustrated

**HOLE DRILLING CONFIGURATIONS**

**2 HOLE CONFIGURATION**



**2 LM (LEFT MIDDLE) HOLE CONFIGURATION**

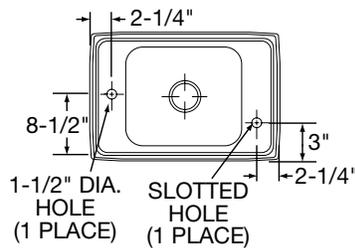

Slotted Hole

**4 HOLE CONFIGURATION**

