

SPECIFICATIONS

GENERAL

#14 gauge, type 304 (18-8) stainless steel multiple station urinal. Welded seamless 1/4" (6mm) radii coved corner construction. Full length sloping backsplash. 1-1/2" (38mm) wide sloping top channel rim with 2" (51mm) flat front apron. Slanted front. Exposed surfaces polished to a satin finish. Bottom and back are sound deadened. Furnished with a continuous length wall hanger, integral stainless steel mounting "Z" brackets, and continuous flush pipe and drain.

(CHECK MODEL SPECIFIED)

☐ EU4814C

☐ EU6014C

FURNISHED COMPLETE WITH:

SUPPLY FOR EU4814C: LK388. Chrome plated brass con-

tinuous flush pipe, 3/4" (19mm) O.D. tubing. With flush pipe holders.

SUPPLY FOR EU6014C: LK392. Chrome plated brass con-

tinuous flush pipe, 3/4" (19mm) O.D. tubing. With flush pipe holders.

DRAIN: LK177. Chrome plated beehive strainer, 1-1/2"

(38mm) O.D. tailpiece.

FOLLOWING MODELS DO NOT INCLUDE SUPPLY AND DRAIN FITTINGS:

☐ EU4814


☐ EU6014

URINAL IS PRE-DRILLED FOR PIPE HOLDERS AND DRAIN.

DIMENSIONS

Model Number	Α		В		C		D		E		F		G		Н		I		J		K	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
EU4814	48	1219	14	356	24	610	5 ¹ / ₂	140	8	203	221/2	572	41/8	105	4	102	10	254	3	76	12	305
EU6 14	60	1524	14	356	30	762	51/2	140	8	203	281/2	724	41/8	105	4	102	10	254	3	76	12	305

Model EU4814C

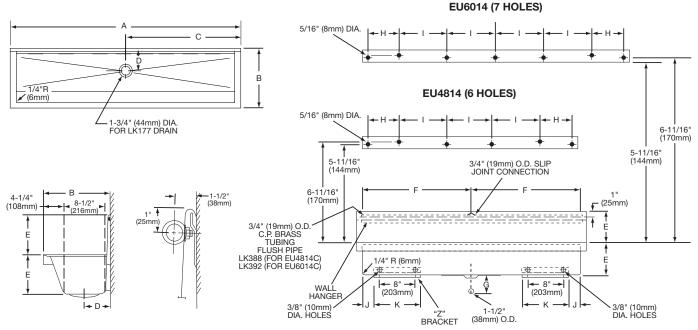

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.