

**Scrub-up Sink, Sensor-Operated,  
Single Station, Wall Mounted  
Models EWSF13026SACC and EWSF13026**



**SPECIFICATIONS**


**GENERAL**

#16 gauge, type 304 (18-8), stainless steel single station slant front scrub-up sink with sensor faucet, coved corners, keyed access door, wall hanger, full length backsplash and full enclosure. Exposed surfaces are polished to a satin finish. Underside is sound deadened.

**FURNISHED COMPLETE WITH:**

**SUPPLY:** **LK720AC** Sensor-operated, deck-mounted, goose-neck faucet with adjustable sensor eye, adjustable temperature control and manual override. AC powered, chrome plated – solid brass construction. 15-1/4" (387mm) high (bottom of base to top of spout) and 8" (203mm) reach spout with 2.0 GPM laminar flow control, 10-1/4" (260mm) from deck to spout outlet. Includes vandal-resistant, water-resistant sensor control module with armored vandal-resistant control and power cables. 12V DC plug-in voltage adapter, slow-closing piston operated solenoid valve, (2) in-line Y strainers with check valves, and (2) 3/8" (10mm) stainless steel braided 19" (483mm) supply line. Control circuit is solid state, has adjustable sensor range (6" [152mm] preset to 30" [762mm]), shut off delay preset at 1 second and field adjustable to 2, 4 or 8 seconds, and automatic time-out feature (to prevent sink overflow) is preset at 0 seconds and is field adjustable to 15, 30 or 60 seconds.

**DRAIN:** **LK18B** Stainless steel perforated strainer grid, drain fitting with 1-1/2" (38 mm) O.D. x 4" (102mm) stainless steel tailpiece.

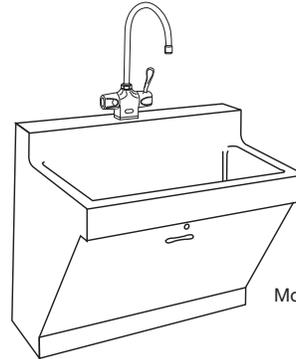

Model EWSF13026SACC

**FOLLOWING MODEL DOES NOT INCLUDE SENSOR FAUCET AND DRAIN:**

- EWSF13026


**SPECIFY FAUCET DRILLINGS AND LOCATION.**

**OPTIONAL (Specify Separately):**

- LK723** Anti-scald thermostatic mixing valve with nickel plated brass body, 1/2" (13mm) union SWT inlets and outlet connection. Comes with internal check valves on inlets and mixed temperature range of 80° – 120°F.
- LK729** Battery holder with (4) AA batteries for converting LK720AC to battery powered.
- LK731** Rose spray head, 2.5 GPM, female thread.

**DIMENSIONS**

Model Number	A		B		C		D		E		F		G		H		I		J	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
<b>EWSF13026</b>	30	762	23	584	26	660	16 1/4	413	2	51	15	381	8 1/8	206	4	102	11	279	22	559

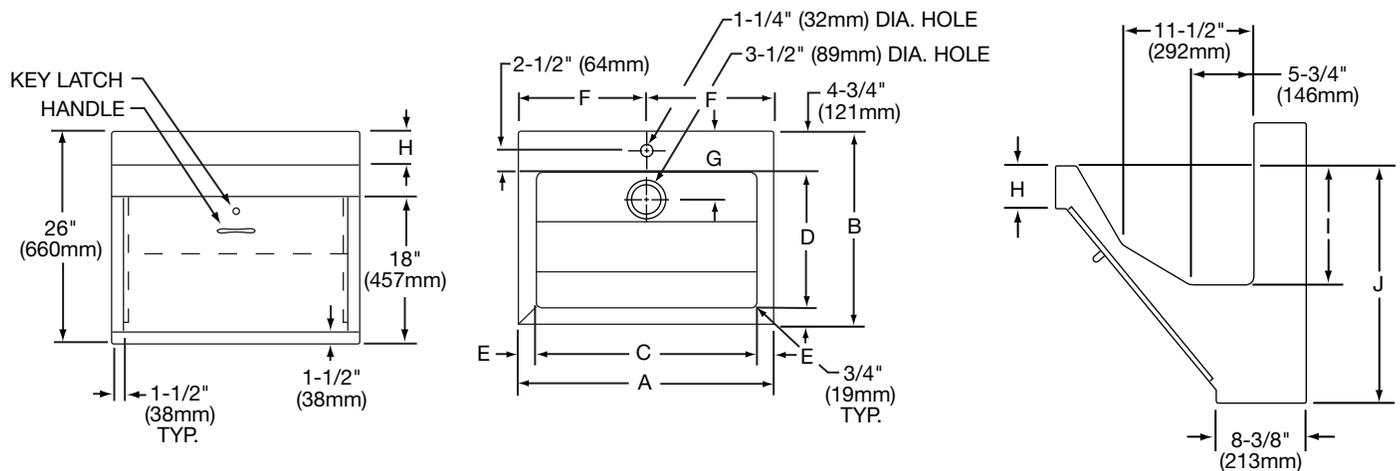


NOTE: SEE REVERSE SIDE FOR ROUGH-IN DIMENSIONS


*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.*

*This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*

**ROUGH-IN DIMENSIONS**

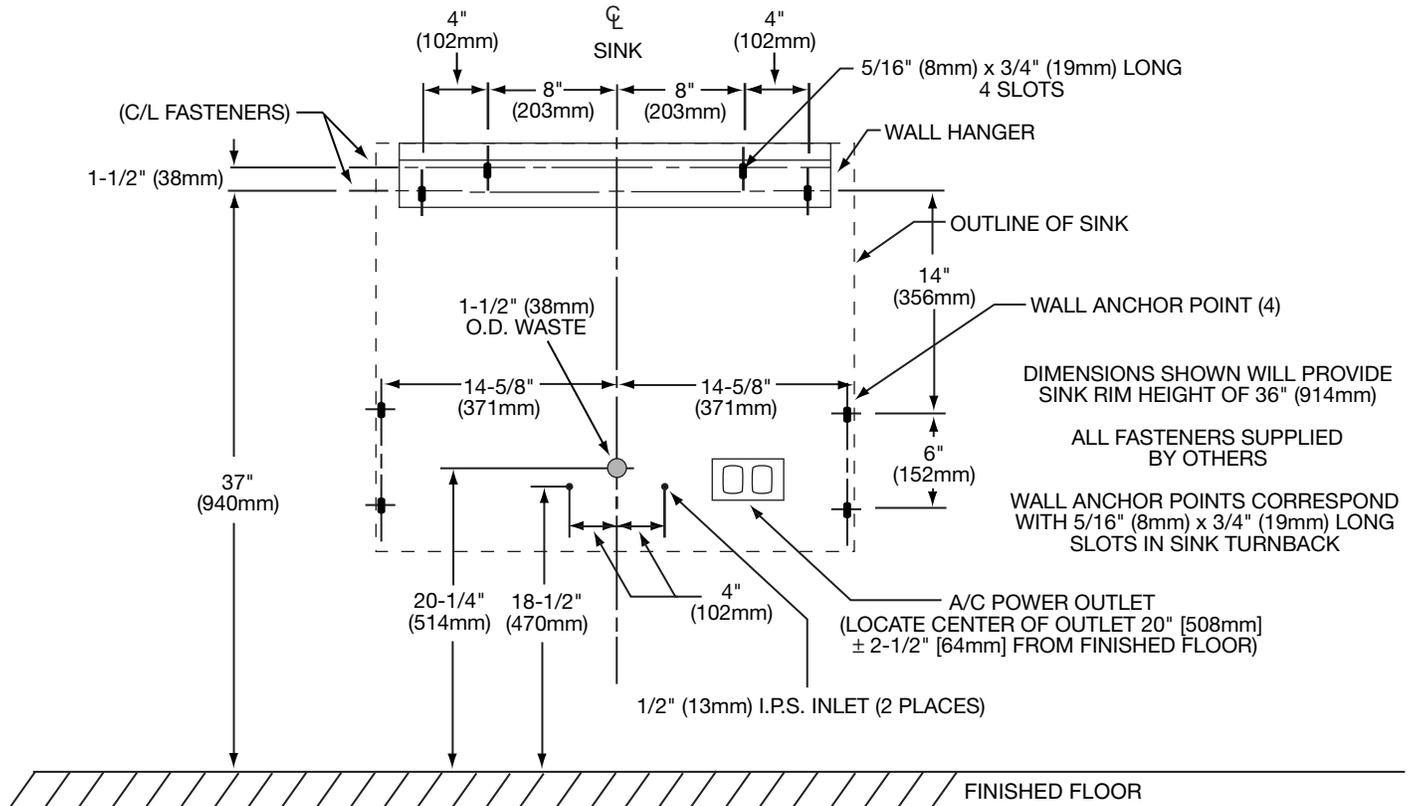


**FIG. 1**

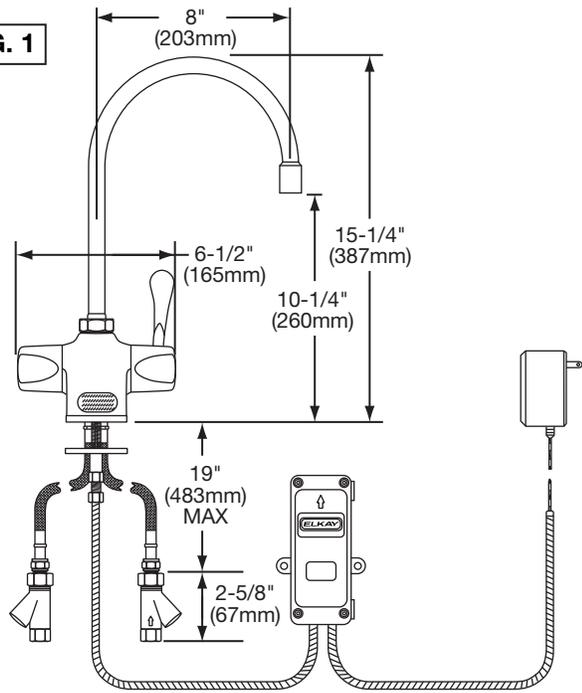

**LK720AC SENSOR FAUCET**

**SINGLE STATION ROUGH-IN**

**FIG. 2**

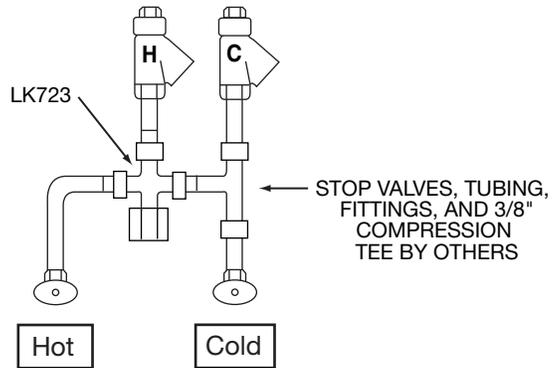

**LK720AC SENSOR FAUCET WITH OPTIONAL  
LK723 THERMOSTATIC MIXING VALVE**