

**No Lead Two-Level SwirlFlo® Drinking Fountain  
Wall Mount, Barrier-Free Access with Surface  
Mounting Plate Model EDFPAM117RAC (Reversed)**



**SPECIFICATIONS**

**GENERAL**

Fully exposed two-level fountains are #18 gauge, type 304 stainless steel polished to a lustrous satin finish with high shine outer edge. Stainless steel support arm incorporates unique recess to be integrated with basin. One fountain position lower on the left and projects out for wheelchair use. The other positioned on the right at standing height and projected for standard use.

Fountains have contoured basin that minimizes splashing. Flexi-Guard® safety bubblers which are keyed in location to prevent rotation. Fully functional, stainless steel, vandal-resistant front push bars with raised letters to aid the visually impaired. Patented\* valve and in-line flow regulator provides constant stream from 20 to 105 psi. Includes vandal-resistant bottom cover plates. The letter M in the model number includes surface mounting plate (e.g. EDFPAM117RAC). To have surface mounting plate shipped ahead of fountain, order MP20A surface mounting plate separately and fountain without the M in the model number (e.g. EDFPA117RAC). See ALSO AVAILABLE and ACCESSORIES sections for details.

**THIS DRINKING FOUNTAIN COMPLIES WITH THE REQUIREMENTS OF A.D.A. (AMERICANS WITH DISABILITIES ACT) PROVIDING THE UNIT IS INSTALLED IN AN ALCOVE OR WITH RIGHT AND LEFT WING WALLS.**


**NO LEAD DESIGN**

**THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.**

Elkay Drinking Fountains are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all leaded materials, such as leaded brass, have been removed.



This drinking fountain is classified by Underwriters Laboratories Inc. in accordance with **ANSI/NSF61, Section 9-1997b.**

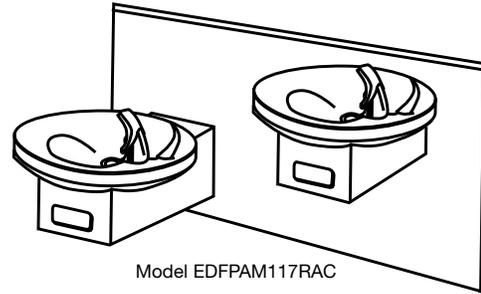

Model EDFPAM117RAC

**CONSTRUCTION**

**EDFPAM117RAC** two-level fountain furnished complete with Flexi-Guard® fully assembled with front push bars, patented\* valve and in-line flow regulator (120 to 105 p.s.i.), stainless steel back plate, vandal-resistant bottom cover plates, and surface mounting plate. No traps are furnished.

**ALSO AVAILABLE**

**Model EDFPA117RAC:** Same as model above without surface mounting plate.



**Model EDFPAM117RABC:** Same as model EDFPAM117RAC above except in Bronzestone finish.

**Model EDFPAMVR117RAC:** Includes vandal-resistant bubblers. Heavy duty, one-piece construction, chrome plated brass.

**ACCESSORIES**

**MP20RA:** Surface Mounting Plate. Needed when ordering a **EDFPA117RAC, EDFPA117RABC, or EDFPAVR117C** without surface mounting plate. See separate specification sheet for details on MP20RA.

**Bronzestone Cleaning Note:** Be sure to clean bronze finish surfaces with only a mild detergent or vinegar and water. Rinse well with clean water and wipe dry with a soft cloth. Any misuse or abrasion can eventually damage the bronze finish.

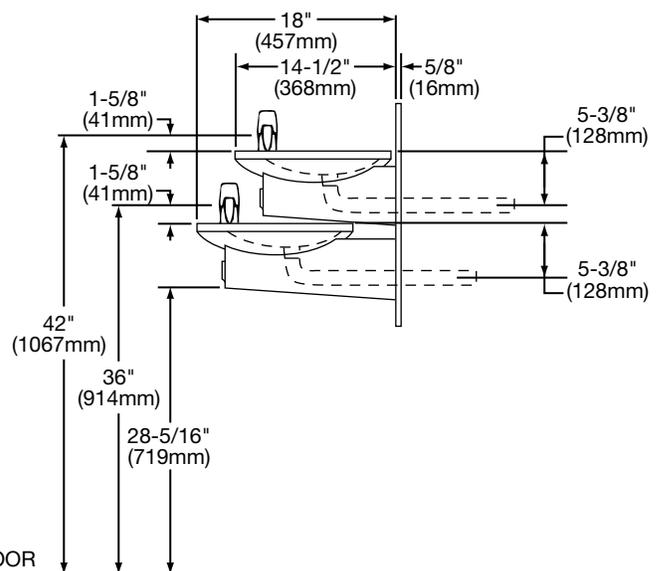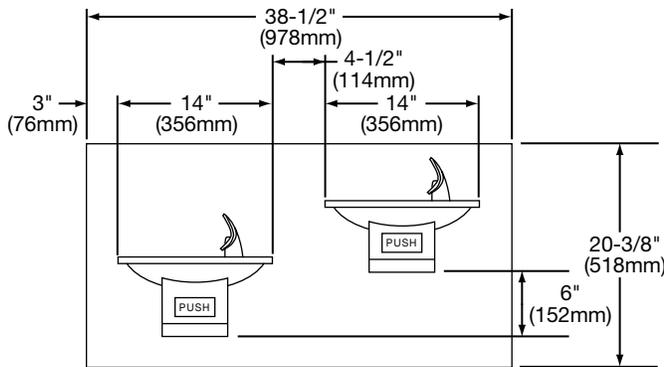

FINISHED FLOOR

\* Patent #4,481,971

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

**No Lead Two-Level SwirlFlo® Drinking Fountain  
Wall Mount, Barrier-Free Access with Surface  
Mounting Plate Model EDFPAM117RAC (Reversed)**




**ELKAY®**

**ROUGH-IN DIMENSIONS**

**INSTALLER NOTE**

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL. IT IS RECOMMENDED THAT SHUT OFF VALVE AND SUPPLY TUBING SUPPLIED BY OTHERS BE NON-METALLIC.

**OPERATION OF QUICK CONNECT FITTINGS**

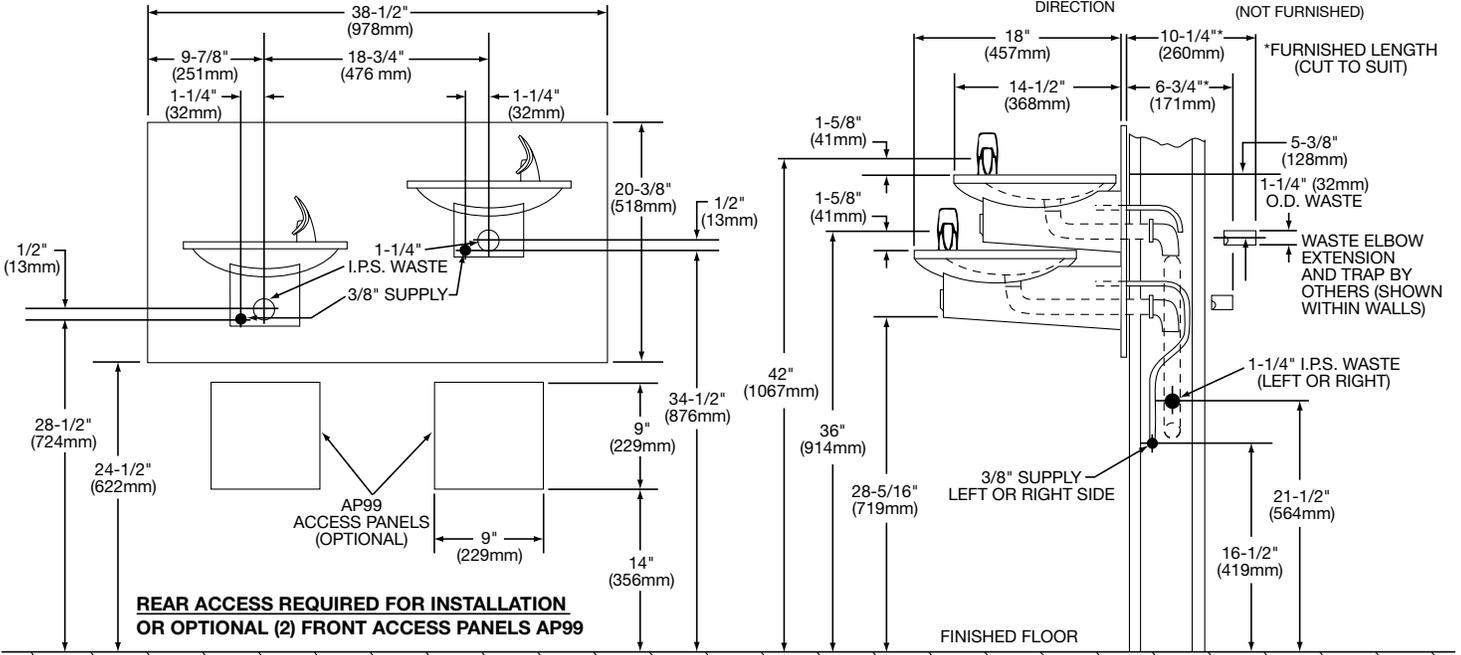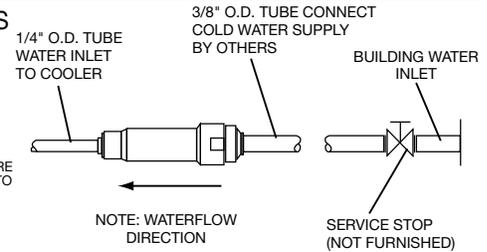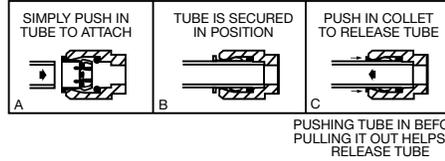

**SURFACE MOUNTING PLATE INSTRUCTIONS**  
(SEE MP20RA SPEC SHEET FOR DETAILS)

**NOTE:** Reinforce the wall in the shaded areas to support up to 300 lbs. static load.

