

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### EZH20™ System

#### Filterless Surface Mount

#### Model EZWSSM


### PRODUCT FEATURES

- Installs directly onto wall with robust hanging bracket for applications with limited wall depth
- Complete with drain; no bubbler required
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- Silver Ion anti-microbial protection
- Quick fill rate is 1.5 gpm standard; 1.1 gpm when paired with remote chiller
- Laminar flow provides minimal splash
- Visual user interface display includes:
  - Green Ticker™ counting the quantity of plastic bottles saved from waste
- Optional remote chiller packages installed within 15 feet delivers chilled drinking water

Bottle filling unit shall mount on wall surface and include hanging bracket. Unit shall include drain. Shall include an electronic sensor for no-touch activation with an automatic 20-second shut-off timer. Shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Unit shall meet ADA guidelines for parallel approach. Shall be lead-free design which meets the Safe Drinking Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120. Unit shall be GreenSpec Listed.

### SUGGESTED SPECIFICATION

### IMAGES

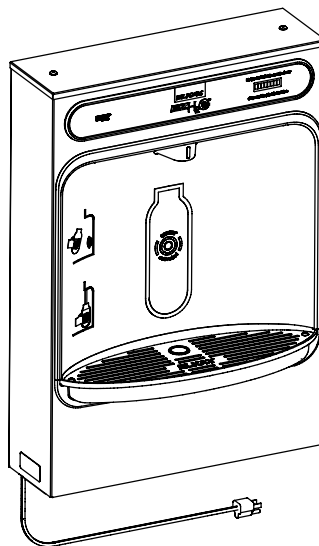

### OPTIONAL ACCESSORIES

Ideal for use in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

### APPLICATIONS

2222 Camden Court  
Oak Brook, IL 60523



Phone: 630-572-3192  
Web: Elkayusa.com



Third Party Certified to:

- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953

\*Rated for Indoor Use Only

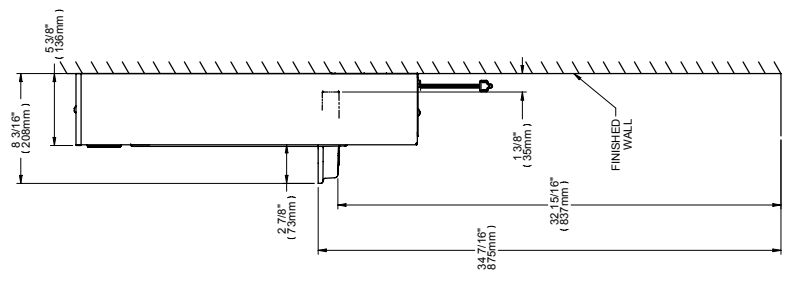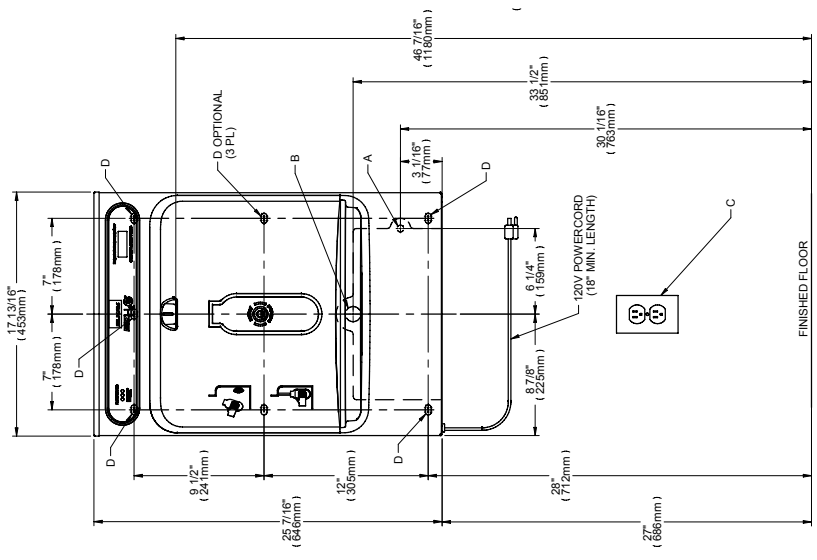

### LEGEND:

- A = Recommended water supply location; 1/2" IPS maximum pipe size. Service stop valve not furnished.
- B = Recommended location for waste outlet 1-1/4" O.D. maximum pipe size.
- C = Electrical outlet, three (3) conductor grounded. Locate within safe reach of power cord.
- D = 7/16" x 3/4" obround mounting holes for fastening backplate to wall.

Job Name: \_\_\_\_\_ Qty: \_\_\_\_\_

Date: \_\_\_\_\_

Contact Info (Name, Phone, Email): \_\_\_\_\_

Approval for Manufacture Signature and Date: \_\_\_\_\_

Specifications and measurements are subject to change without notification. Please visit [elkayusa.com](http://elkayusa.com) for most current version.

2222 Camden Court  
Oak Brook, IL 60523  
Phone: 630-672-3192  
Web: [Elkayusa.com](http://Elkayusa.com)

## Model EZWSM