


How to remove the faucet cover

- 1 Pull the transparent ring toward you.




- 2 Then ,pull on the ring in a angle and keep the pressure downward

- 3 Slide the cover toward you

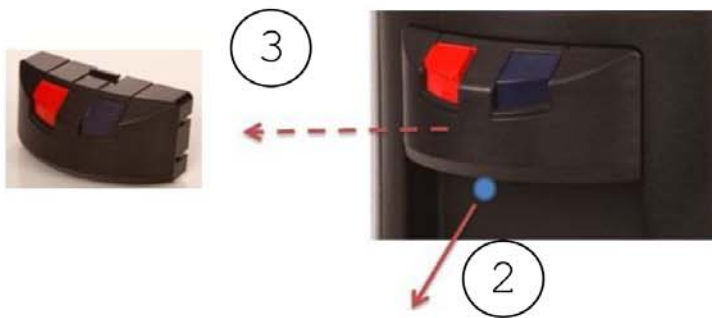

- 4 Position the lever on the actual faucets .
** They must be straight so that the push button when press down catches the faucet lever. **

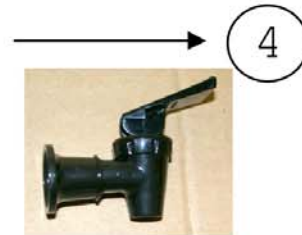

- 5 Put back the cover , slide it into place.

To replace a faucet....

Insert a pen or pencil into the faucet exit as pictured and push upward to raise the white post. Once fully raised slide the faucet pins out from underneath the notch in the post.

Reverse to install new handle

