PRODUCT SPECIFICATIONS

Elkay SwirlFlo® Bi-Level Reverse Fountain Non-Filtered, Non-Refrigerated Stainless. Furnished with Vandal-Resistant bubbler. Mechanical Front Bubbler Button activation. Product shall be Wall Mount (On-Wall), for Indoor/Outdoor applications, serving 2 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

Finish:	Stainless Steel
Power:	No Electrical Required
Bubbler Style:	Vandal-Resistant
Activation by:	Mechanical Front Bubbler Button
Mounting Type:	Wall Mount (On-Wall)
Chilling Option:	Non-Refrigerated
Dimensions (L x W x H):	38-1/2" x 19" x 21-15/16"
Approx. Shipping Weight:	72 lbs.
Installation Location:	Indoor/Outdoor
No. of Stations Served:	2

- Mechanically-Activated bubbler continues to supply water in event of service disruptions.

- Vandal-resistant, bubblers are one-piece, chrome plated with integral hood guard design to prevent contamination from other users, airborne deposits and tampering.

AMERICAN PRIDE. A LIFETIME TRADITION.
Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

Included with Product: Fountain with Back Plate, Surface Mounting

PRODUCT COMPLIANCE

ADA & ICC A117.1

Buy American Act

NSF/ANSI 61 & 372 (lead free)

Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

Installation Instructions (PDF)

Water Systems are warranted for 12 months from date of installation. **Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.**

Warranty (PDF)

OPTIONAL ACCESSORIES

EWF172 - WaterSentry VII Filter Kit (Coolers + Fountains)
AP99 - Accessory - Access Panel
ACCESS12X38-5 - Access Panel

PART:_____QTY: _____

PROJECT:_____

CONTACT:_____

DATE:_____

NOTES:_____

APPROVAL:_____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay REV 05312018
EDFPBMV117RAC

2222 Camden Court
Oak Brook, IL 60523

© 2018   Page 1
EDFPBMV117RAC_spec.pdf

INSTALLER NOTE

This drinking fountain is furnished with a bubbler and valve including all connecting fittings which are manufactured of completely lead free material. Shut off valve (not furnished) to accept 3/8" O.D. unplated copper tube.

These products are designed to operate on 20 psi to 105 psi supply line pressure. Simultaneous operation of both bubblers on a bi-level unit may not be possible depending on water supply pressure. If simultaneous operation is desired, please ensure a minimum of 50 psi supply.

OPERATION OF QUICK CONNECT FITTINGS

SIMPLY PUSH IN TUBE TO ATTACH

TUBE IS SECURED IN POSITION

PUSH IN COLLET TO RELEASE TUBE

A   B   C

PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE

1/4" O.D. TUBE WATER INLET TO COOLER

3/8" O.D. TUBE CONNECT COLD WATER SUPPLY

BUILDING WATER INLET

NOTE : WATERFLOR DIRECTION

SERVICE STOP (NOT FURNISHED)

38-1/2" (978mm)
9-7/8" (251mm)
18-3/4" (476mm)
14" (356mm)
21-15/16" (557mm)
9" (229mm)
9" (229mm)
14" (356mm)

AP99 ACCESS PANELS (OPTIONAL)

REAR ACCESS REQUIRED FOR INSTALLATION OR OPTIONAL (2) FRONT ACCESS PANELS AP99

SURFACE MOUNTING PLATE INSTRUCTIONS

18-3/8" (467mm)
5/8" (16mm)
1-5/8" (41mm)
1-5/8" (41mm)
41-11/16" (1059mm)
33-15/16" (863mm)
27" (686mm) ADA REQUIREMENT

WASTE ELBOW EXTENSION AND TRAP BY OTHERS (SHOWN WITHIN WALLS)

1-1/4" I.P.S. WASTE (LEFT OR RIGHT)

3/8" I.P.S. SUPPLY (LEFT OR RIGHT)

36-1/2" (927mm)
28-3/4" (729mm)
21-1/2" (546mm)
16-1/2" (419mm)

FINISHED FLOOR

NOTE: REINFORCE THE WALL IN THE SHADED AREAS TO SUPPORT UP TO 300 LBS. STATIC LOAD

9-3/4" (248mm)
18-3/4" (476mm)
1-1/4" (32mm)
1-1/4" (32mm)

SURFACE MOUNTING PLATE

5/16-18 THREADED HOLES FOR MOUNTING FOUNTAINS TO WALL

1/4" (6mm) Ø HOLES FOR MOUNTING PLATE TO WALL

3/8" (10mm) Ø HOLES FOR MOUNTING PLATE TO WALL (20)

43-5/8" (1108mm)
29-1/4" (743mm)
8" (203mm)
8" (203mm)
28-3/4" (730mm)
8" (203mm)
14-1/4" (362mm)
18-3/4" (476mm)
37" (940mm)
36-1/2" (927mm)

WASTE TRAP (BY OTHERS)

SUPPLY (SHUT OFF BY OTHERS)

OPENING FOR (2) OPTIONAL AP99 ACCESS PANELS

FINISHED FLOOR
FRONT VIEW

LOAD BEARING WALL CONSTRUCTION

5/8" (16mm)

INSTALL (2) 1/4" (6mm) SCREWS OR EQUIVALENT (BY OTHERS)

ATTACH SURFACE MOUNTING PLATE TO FINISHED WALL

20-1/8" (511mm)

WASTE 1-1/4" I.P.S. LEFT OR RIGHT SIDE WASTE IS SHOWN IN WALL BUT MAY BE BEHIND WALL

INSTALL (12) 5/16" (8mm) LAG SCREWS OR EQUIVALENT WITH FLAT WASHERS (BY OTHERS)

3/8" I.P.S. SUPPLY (LEFT OR RIGHT)

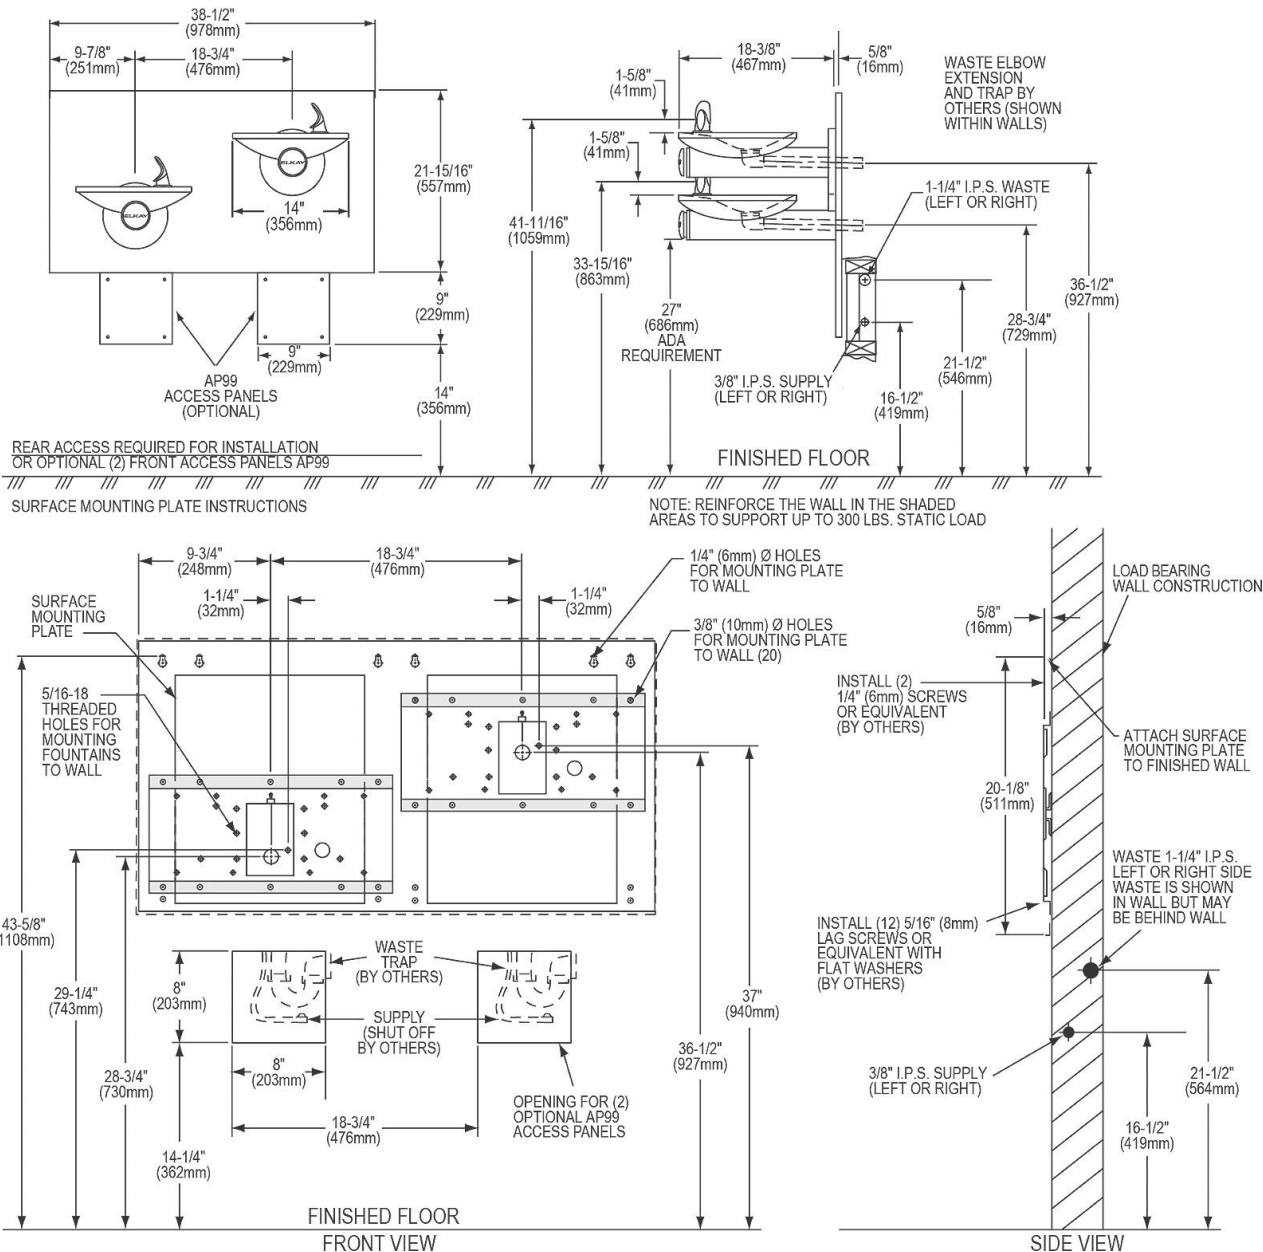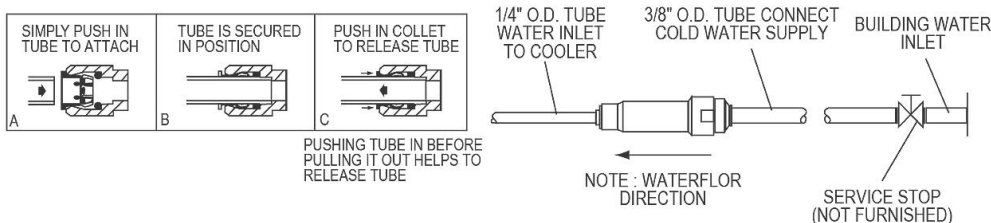21-1/2" (564mm)
16-1/2" (419mm)

SIDE VIEW

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay REV 05312018
EDFPBMV117RAC
2222 Camden Court
Oak Brook, IL 60523
© 2018   Page 2
EDFPBMV117RAC_spec.pdf